
Starlet


ECLIPSE




KamoGa

Karaoke | Movie | Gaming

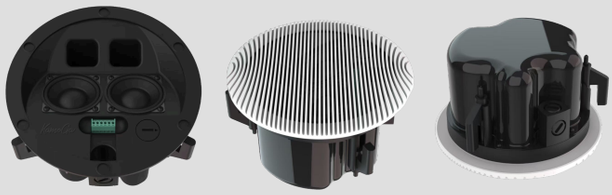







Model: Starlet Eclipse

- Frequency Response (-3dB): 210Hz - 20kHz
- Frequency Range (-10dB): 189Hz - 20kHz
- Sensitivity (SPL /1W /1m): 90dB ± 3dB
- Driver Unit: 2 x 2”
- Rated Power: 40W
- Peak Power: 60W
- Nominal Impedance: 8Ω (When transformer bypassed)


- Product Dimension: Ø 187mm x 113mm
- Cutout Size: Ø 160mm
- Net Weight: 980g / piece
- Installation Method: Ceiling mounting, Suspended
- Ceiling Thickness (For Installation): 13 - 38mm

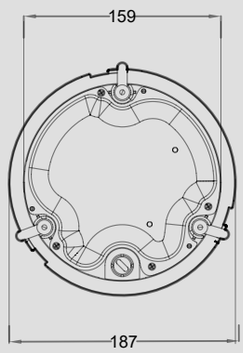




8 Ω

Transformer Taps: 8Ω (Bypass)
70V Line: 10W, 20W, 40W
100V Line: 10W, 20W, 40W
(Daisy Chain Application)

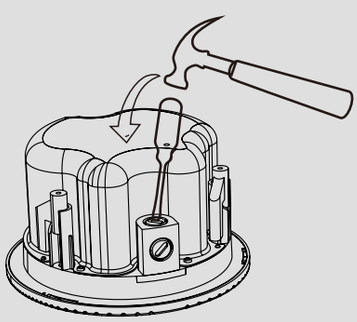

Specific Wire Entry Path



Tilted 2” x 2 Drivers
Position to hit sweet spot
Position to bounce off walls

Find out more setup information and detailed information at www.thunderstonektv.com

Compatible Systems (Optional)

3.1



5.1



5.1 Wireless



7.1



KMG 3.1 Basic Wiring and Installation $480
KMG 5.1 Basic Wiring and Installation $580
KMG 7.1 Basic Wiring and Installation $680

Thunderstone Technology (S) Pte Ltd
61 Ubi Road 1 #01-15/16 S(408727)
+65 8101 1688 | +65 6702 6577